

# READER PA253A-VR

## Metal shutters




ACCESS CONTROL

Thanks to its standalone function, a system with multiple control points can be created.

The reader's intelligence and the information contained in the card is

used to make decisions locally without using a cabled network.

Compatible with all our access control system and electronic purse (multiservice).

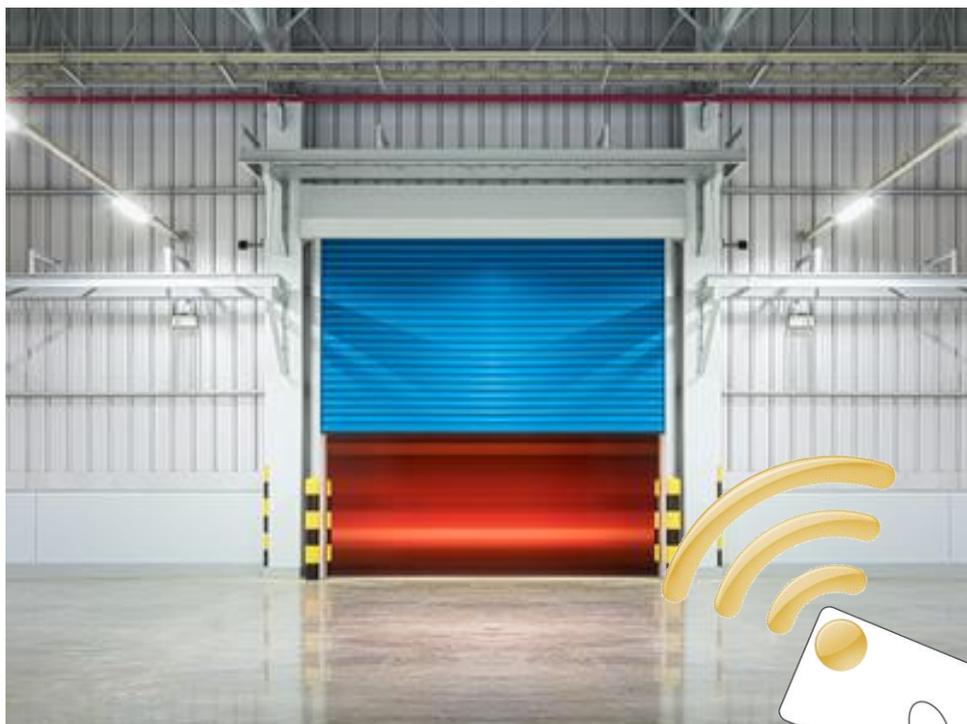

**The standalone access control Mifare reader PA253A-VR is used for metal shutters using contactless RFID smartcard for more security.**



**MiCRO BE**  
Plus qu'une carte



[www.micro-be.com](http://www.micro-be.com)

# Technical specifications

Technical assistance  
Installation and  
configuration  
Training  
Maintenance



Power supply and reader

## Depending on its setup, this reader can:

- ✓ To check validity dates
- ✓ To check access authorizations
- ✓ To check the blacklist (forbidden)
- ✓ To debit cash or tokens
- ✓ To count passages on the card
- ✓ To check the days and access times
- ✓ To set the relay activation time
- ✓ To manage anti-pass back
- ✓ To manage the accounts on the card.

## Mainframe:

- ✓ Autonomous operation (no network)  
Reading/writing of contactless card at a distance of 6 cm.
- ✓ Powered by 12 VDC (250 mA).
- ✓ Operates a switch contact of 1A.

## Dimensions:

- ✓ The box 71 x 91 x 61 mm (DIN rail).

## Options:


- ✓ Multiple aerials (maximum 8)
- ✓ Display 1 line 16 characters

## The smartcard:

- ✓ Robust, waterproof, forgery-proof.
- ✓ Compatible with all our systems.
- ✓ Thickness 0.8mm
- Options:
  - ✓ Screen process printing and/or numbering on the smartcard
  - ✓ Card carrier and cord

## The aerial casing:

- ✓ The reader is protected from vandalism as there are no openings or movable parts.
- ✓ Access is made difficult by being fitted in a wall.
- ✓ Reading distance: 6 cm.
- ✓ Built in or visible fixation.
- ✓ Dimensions 100 x 100 x 20mm.
- ✓ Two-coloured light signalisation.



**COMPATIBLE WITH  
ALL OUR ACCESS  
CONTROL SYSTEM**

**STANDALONE**



Two antennas (entrance/exit)



The keyfob can replace the smartcard

130 rue Berthelot  
Z.I. Toulon Est - BP 387  
83085 Toulon cedex 9 FRANCE  
GPS : 43°08'56.63 N - 6°02'24.52 E  
Telephone: 04 94 14 48 70  
Fax: 04 94 14 48 71  
micro-be@micro-be.com