

# LOCK PA653KS-A

## Electronic



ACCESS CONTROL

The lock is fitted on standard doors.

Mechanical and electrical fitting are not required on the door frame.

The exit remains clear which is a requirement for offices or public halls.

The barrel remains accessible, allowing the door to be locked.

This lock works with four integrated batteries and is completely self-contained.

The lock checks the access rights memorized in the user card (no need to load the card numbers in the lock).

The smartcard is compatible with all MICRO BE software such as catering, access control, electronic purse, etc. This is a multiservice card, with Mifare technology.

Using RFID card programmed with Saxo software



**With a multiservices contactless smartcard, this lock is easy to be installed and to use. This electronic lock is a wireless access control on existing doors.**




**MICRO BE**  
Plus qu'une carte



[www.micro-be.com](http://www.micro-be.com)

# Technical specifications

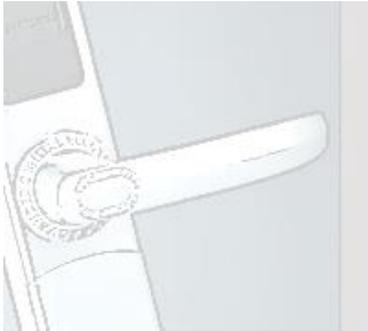

- ✓ Real time clock
- ✓ Memorisation of the last 48 entries
- ✓ Validity date control
- ✓ Control of authorized entry areas
- ✓ Downloadable black list
- ✓ Power supplied by 4 AA batteries (1.5V alkaline)
- ✓ Smartcards using Mifare technology

**Compatible with SAXO software:** each smartcard can be programmed using the encoder reader by associating each user's file.

**The smartcard:** robust, waterproof, forgery-proof.

Compatible with all our systems.

Options: screen process printing and/or numbering on the smartcard, cordless or with badge carrier...



**The opening can be:**


**By impulsion:** the user presents his card, the door handle unlocks, the user opens the door and the handle locks automatically after a certain preset time.

**Permanent:** the user presents his card, the door handle unlocks; the smartcard must be re-presented to lock the door, which is useful for meeting rooms, for example, where the room is opened and locked once the meeting has finished.

The opening time of the lock can be settled with seconds or minutes depending of the needing. This setting is modifiable using the Saxo software.

## Option

A version called SARWIN is available to connect to the network access control. Using this system, the lock is connected to Sarwin software in real time by a RF network (see Sarwin datasheet).

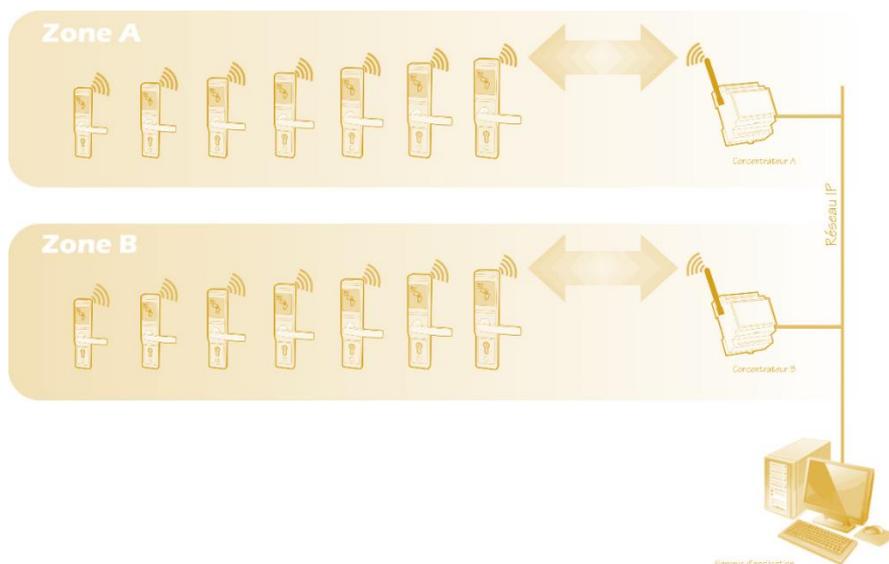

Technical assistance  
Installation and  
configuration  
Training  
Maintenance

**SELF-CONTAINED**

**EASY INSTALLATION**

**COMPATIBLE WITH  
ALL OUR SYSTEMS**

**COST REDUCTION**

130 rue Berthelot  
Z.I. Toulon Est - BP 387  
83085 Toulon cedex 9 FRANCE  
GPS : 43°08'56.63 N - 6°02'24.52 E  
Telephone: 04 94 14 48 70  
Fax: 04 94 14 48 71  
micro-be@micro-be.com